



Brightness Sensor

RL3B

specification

Update Record

No.	Version	Remark	Date
1	Ver.1.0	Initial Release	2019.03.20

Note: The document is subject to change without prior notice.

Shanghai Xixun Electronics Co., Ltd.

Product Picture



Features


RL3B is an accessory brightness sensor with the following features:

1. Sensing the brightness of the current environment, according to the ambient brightness, automatically adjust the brightness of the display;
2. Standard 1.5m line, can be customized if customers have special needs;
3. Connect the sending card to use;
4. Can be used outdoors, three-proof;
5. Digital brightness sensor, higher adjustment accuracy.

Technical Parameter

Probe Length (mm)	27
Hole Diameter (mm)	11
Test Accuracy (%f.s.)	±4.5
Test Range (Lux)	0-192000

Dimensions

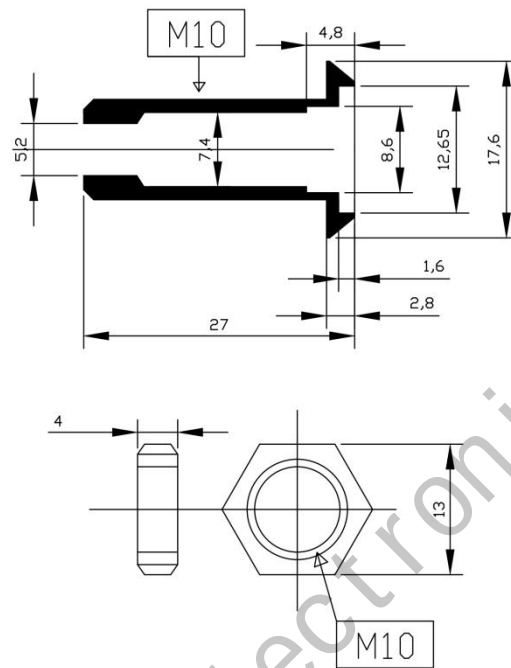

Unit: mm

Connection Diagram

Connection diagram with M80 (plug in Light interface) :



Applicable to: M50/M52/M60/M62/M80/M82 and other asynchronous sending boxes, cannot be used for bare cards. (Without box with RL3 without aviation plug 4pin terminal)

Cautions

1. Pay attention to waterproof.
2. Do not touch the chips and pins on the product to avoid electrostatic damage.

